

A leader and innovator in the Concrete Products business serving the needs of the transportation and building industry for over 50 years.



PLANT LOCATIONS: DOWNINGTOWN, KUTZTOWN, NEW CASTLE, PA, KING GEORGE, VA and RICHBURG, SC





STANDARD PRODUCT LINE

CONTACT FADDIS TO INQUIRE ABOUT PROJECT SPECIFIC PRODUCTS NOISE BARRIER, RETAINING WALL, SCREEN WALL BALLISTIC RATED PERIMETER SECURITY WALL TRANSFORMER ISOLATION AND FIRE WALL

STONEWALL post and panel noise barrier ACOUSTACRETE® sound absorptive concrete ANGLEWALL™ freestanding shallow foundation noise barrier SHOREWALL™ combination retaining and noise wall LAGGING panels for soldier pile wall MSE retaining wall panel and parapet DURAHOLD concrete crib retaining wall

ACOUSTAL[™] aluminum lightweight sound absorptive noise barrier ACOUSTACLEAR[®] acrylic see-through sound-reflective noise barrier

> TRANSIT platforms, stairway, and parapet wall BRIDGE DECK exodermic and half filled panel ECO-SPAN ARCH BRIDGE STORM-TRAP

TRAFFIC SAFETY BARRIER

PennDOT and PA TURNPIKE standard and non standard shapes JJ - HOOK proprietary temporary safety barrier ARCHITECTURAL safety barrier

JUNCTION BOXES for electric utility and traffic signal applications PERENNIAL PLANTERS for perimeter security applications

PLANT LOCATIONS: DOWNINGTOWN, NEWCASTLE, KUTZTOWN PA KING GEORGE, VA and RICHBURG, SC

Faddis Concrete Products 2206 Horseshoe Pike Honey Brook, PA 19344 610 269-4685 610 942-2629 fax



StoneWall



StoneWall is a post and panel noise barrier that is made to conform to state DOT specs. Post spacing is from 12 to 24 feet using concrete or steel posts, usually on caisson foundations. Panel patterns cast on formliners can take on the appearance of stone, brick or fractured fins. Reverse side of panel is usually a raked surface, or patterns can be stamped into the surface. Panels may be natural gray, acrylic stained in earth tones, or landscaped with climbing vines. Stone patterned panels can be colorized to make the stones look like real quarried stones. Panels stack in wide post spacings or can be full height if post spacing is 12 feet or less. Post foundation connection options are fully embedded, partial embedded or bolt down.



StoneWall

Available in a wide variety of patterns, and colors to meet project specifications.







AcoustaCrete sound absorptive concrete is a durable, free draining material that is approved for use in the demanding environment along Interstate highways subject to freezing and thawing and salt laden snow clearing operations. Available in a variety of patterns. Earth tone colors may be applied using acrylic coatings

Acoustical properties: NRC 70 or higher - single or double sided absorption

Structural properties: Panels for post spacing up to 24 feet c-c Panels for earth retaining structures Panels for AngleWall shallow foundation noisebarrier Posts may be steel, with AcoustaCrete post covers, or concrete, ground or structure mount.



Noise from electric transformers, reactors, and industrial equipment are abated by the installation of AcoustaCrete noise barriers.





Over 5,000,000 square feet of sound absorptive AcoustaCrete walls have been constructed to eliminate reverberation between walls and reflection from noise barriers.






Available in a wide variety of patterns and colors, e.g., brick , field stone, tree bark, graphics, fluted, ashlar stone.





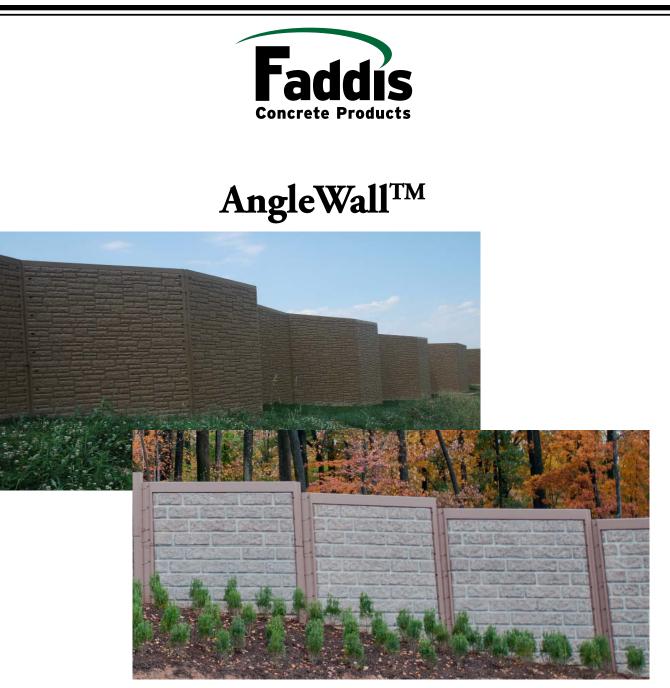

AngleWall is a free-standing wall system, constructed on a shallow foundation of compacted stone. Panels are reflective concrete or AcoustaCrete facing. The undulating panel pattern has an offset for stability. Panels stack to reach wall height. Panel finishes can be created in any formliner pattern. Colors are achieved with acrylic stains.



AcoustAL is a low weight perforated aluminum noise barrier panel designed for noise control applications where ease of installation, durability and broad band sound absorption and an NRC of 1.0 are requried. AcoustAL can be installed as an absorber on existing walls, or interior spaces in industrial or broadcast and recording applications. Panels are powder coated after perforating, prior to assembly, allowing coating of perf holes.

Post spacing is typically 8 to 12 ft c-c between steel posts, making panels light enough to handle by hand. Colors can be selected from powder supplier color charts.



AcoustaClear[®]



AcoustaClear with Optix extruded acrylic noisebarrier has been installed on an Interstate highway project as shown above on I-71 in Ohio and is ready for applications requiring visibility and protection from noise.



Transmission loss measured per ASTM E-90 is STC 32 for 1/2" acrylic and STC 34 for 3/4". Galvanized steel frames are available for post spacing of 8, 10, 12, 16, 20 or 24 feet. Anodized aluminum frames available in post spacing up to 16 feet Posts may be steel or concrete, ground or structure mounted.



ShoreWall



ShoreWall is a post and panel noise barrier that is designed to retain earth. Post spacing is typically 16 feet using concrete or steel posts in caisson foundations. Posts are embedded fully or partially into the foundation for most wall designs. Designs are site specific, but can retain 8 feet of earth on a 24 ft tall noise barrier. If 12 feet of earth must be retained, reduce post spacing to 8 feet. Panels are thicker where the earth pressure is applied. Drainage is an important design consideration. StoneWall or AcoustaCrete features apply.



Lagging Panel



Lagging panels are supplied for post and panel retaining walls that are designed to retain earth. Post spacing is designed for site specific conditions using concrete or steel posts. Posts are embedded fully or partially into caisson foundations. Tie-back connections may be incorporated into posts. Drainage is an important design consideration. AcoustaCrete surface available.



MSE Retaining Wall

Faddis precasts facing panels and parapets for MSE retaining wall systems.





DuraHold® Precast Interlocking Retaining Wall





Precast Concrete system for use in Streambanks, Slide correction, Seawalls, Cut slopes, Explosion Barricades, and all variety of grade separation applications where a single wall or bin wall is best. Walls withstand high flow rates and submersion with rapid draw-down. Ideal for riverside use. Architectural stone pattern DuraHold II facing also available. PennDOT approved.



DuraHold® Precast Interlocking Retaining Wall



PennDOT Maintenance District 5-2. needed to replace failing railroad - tie walls. Architectural stone pattern facing also available. PennDOT approved.



Precast Concrete components for use in SEPTA & WMATA, NJ Transit and other system. Precast yellow tactile warning strips. Project specific designs.



Bridge Decks Filled Decks, Exodermic Decks



Precast Concrete bridge decks using Exodermic, Full, or Half-filled steel decking systems, supplied for PennDOT, West Va DOT, Mass DOT, NYSDOT. Harvey Taylor Bridge over the Susquehana River. Project specific designs.



ECO-SPAN Arch Bridge Headwalls & Wing Walls



Precast Concrete Arch Bridge using EcoSpan arches, head walls and wing walls. Project specific designs.



Safety Barrier Temporary, Permanent & JJ-Hook



Precast Concrete barrier in all of its DOT approved varieties are available including special shapes, transitions, parapets, bolt down, bridge mount and combination retaining wall shapes. Architectural features are also available.



Safety Barrier Parapet, Architectural, Special



Precast Concrete barrier in all of its DOT approved varieties are available including special shapes, transitions, parapets, bolt down, bridge mount and combination retaining wall shapes. Architectural features are also available.



Electrical Junction Boxes



Precast Concrete junction boxes conforming to project requirements Project specific designs available.



ARCHITECTURAL CAST STONE

STANDARD and CUSTOM ARCHITECTURAL ELEMENTS produced by VIBRANT DRY TAMP & WETCAST METHODS



Lower Macungie Fire Station

Corporate Office 2206 Horseshoe Pike Honeybrook, PA 19344 610 269-4685 610 942-2629 fax www.faddis.com info@faddis.com





Cast Stone Operations and Sales 3515 Kings Highwaay Downingtown, PA 19335 484 556-4524 610 269-4106 fax www.faddis.com BCLEMMER@faddis.com



ARCHITECTURAL CAST STONE VIBRANT DRY TAMP AND WETCAST



Faddis Advantages include in-house shop drawings, and custom molds made by our skilled carpenters

for ESTIMATES & more INFORMATION : CONTACT BRANDON CLEMMER 610 587-5534, 610 269-4106 fax bclemmer@faddis.com Horsham Police Station St Constantine & Helen Church, Reading, PA HAGAN ARENA



St Joseph's Univeristy